


# TJAG175P

## Industrial Diesel Generator Sets

Tier 3 EPA Certified for Stationary Emergency Applications

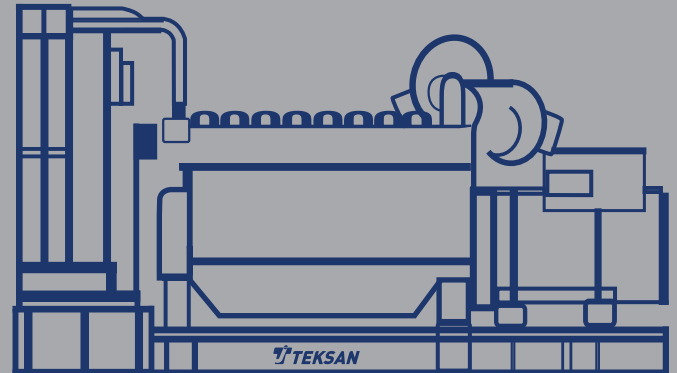

### Genset Standby Power Rating

Voltage	240/120V
Power	175kW
Phase	1
Pf	1
Current	729A
Alternator Model	TAL046E
Temp Rise	125 / 40 °C
Connection	12 Leads DD

#### Continuous Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a constant electrical load. Average load can be 100%. The generator must not be overloaded.

#### Prime Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

#### Standby Power

The max power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hrs of operation per year under average of 70% load. Overloading isn't permissible.

### Certifications & Standards

The Generator set is designed and manufactured in a facility certified to **ISO9001:2015, ISO14001:2015, ISO45001-2018** and **ISO10002:2014** standards.

Generator set meets **ISO 8528-5**

The generator set, with its components, are **prototype tested**, factory-built and production tested.

### Standard Features - Engine

EPA Certified – Emergency Stationary Only

Heavy-duty, 4-cycle, direct injection

Unit Mounted Radiator

Electronic Isochronous Governor

Fuel – Water Separator Filter

ISO 8528, ISO 3046, BS 5514, DIN 6271 standards

Capable of full rated load acceptance in one step

Low emission and maximum reliability and durability

Heavy Duty Air Cleaner w/Restriction Gauge

Flex Exhaust Connection

### Application Data - Engine

#### Engine

Manufacturer	Perkins
Model	1106D-E70TAG4
Number of Cylinders	6 Inline
Cycle	4 strokes
Cubic Capacity	7.01 liters
Bore x Stroke	105 mm x 135 mm
Aspiration	Turbocharged and air charge cooled
Combustion System	Direct Injection Diesel
BMEP	1991.2 kPa
Gross Engine Power	209.4 kW
Net Engine Power	199.4 kW
Rated rpm	1800
Speed Variation at Constant Load	±0.28%

#### Fuel Consumption

Standby Power (110% of Prime)	13.8 gal/hr.
Prime Power (100%)	12.8 gal/hr.
At 75% of Prime	10.2 gal/hr.
At 50% of Prime	6.3 gal/hr.

#### Cooling System

Ambient Capacity of Radiator	122 °F (50 °C)
Total Coolant Capacity	20.5 liters
Engine Coolant Flow	170 liters/min
Combustion Air Flow	15.4 m3/min
Fan Power	8 kW
Max Top Tank Temperature	108 °C
Thermostat Operating Range	82 °C to 95 °C

#### Electrical System

Starting Motor Voltage	12V
Battery Charging Alternator	65A
Battery Qty, CCA Rating	1 x 102Ah, 860A

#### Exhaust System

Exhaust Gas Temp	509 °C
Max Allowable Back Pressure	15 kPa
Exhaust Gas Flow	34.27 m3/min
Engine exhaust outlet size (internal)	115.9 mm

#### Fuel System

Type of Injection System	Electronic CRIN2
Fuel Pump	CB28
Governor Type	Electronic
Priming Pump Type	Manual
Max Fuel Flow	6.6 liters/min

#### Lubrication System

Total lubricating capacity	17.5 liters
Max Oil Continuous Temperature	125 °C
Oil Consumption @ Full Load (% of fuel)	<0.1%
Pressure at Max No-load Speed	340 kPa

### Standard Features - Alternator

Brushless Single Bearing

125/40 °C Temperature Rise

Class H Insulation

Low waveform distortion with non-linear loads

EC 60034-1; CEI EN 60034-1; NEMA MG 1.22, NF 51- 100,111

AREP Excitation

300% Short Circuit Capability

Low reactance 2/3 pitch windings

Self-ventilated and drip-proof construction

BS 4999-5000; VDE 0530, OVE M-10

### Application Data - Alternator

Manufacturer	Leroy Somer
Type	4 Poles, Brushless
Protection	IP 23
Voltage Regulation	$\pm 0.25\%$
One Step Load Acceptance	100% of rated load
Bearing	Single
THD in Linear Load	< 5%
Waveform: NEMA TIF	< 50
Altitude	$\leq 1000$ meters
Over Speed	2250 rpm
AVR	D350
Genset Voltage	240/120V
Alternator Model	TAL046E
Leads	12 – DD
P.F.	1
Power @ Continuous 40 °C	182kVA / 182kW
skVA @ 30% Voltage Dip (P.F.=0.6)	-
Efficiency @ 100% load	89,60%
Short Circuit Current @ 100ms	-

### Control Panel

Manufacturer	DSE - Deep Sea Electronics
Model	7310 MKII
DC Supply	8 to 35V Continuous
Generator Voltage Range (Ph-Ph)	26V to 719V AC
Generator Frequency Range	3,5Hz to 75Hz
Standards	BS EN 61000-6-2, BS EN 61000-6-4, BS EN 60950, BS EN 60529 BS EN 60068-2-1, BS EN 60068-2-2 BS EN 60068-2-6, BS EN 60068-2-30 BS EN 60068-2-78, BS EN 60068-2-27



### Key Features


License free PC software
4-Line back-lit LCD text display
Five key menu navigation
LCD Alarm Indication
DSENet expansion compatibility
Internal PLC editor
Protection disable feature
Data logging facility
Fully configurable via PC
Front panel configuration
Power safe mode
6 configurable DC outputs
2 configurable volt free relay outputs
6 configurable analogue/digital inputs
8 configurable digital inputs
Configurable 5 stage dummy load and load shedding outputs
Backed up real time clock
Fuel usage monitor and low fuel level alarms
Remote SCADA monitoring via DSE Configuration Suite PC Software
Advanced SMS messaging (additional external model required)
Start & Stop capability via SMS messaging
Configurable event log (250)
Multiple date and time scheduler

### Protections

✓ Gen. Voltage – under / over
✓ Gen. Freq. – under / over
✓ Engine Speed – under / over
✓ Engine Oil Pressure – low
✓ Engine Temp – low / high
✓ Battery Voltage – low / high
✓ Weak Battery
✓ Fail to Start / Stop
✓ Charge Alternator Fail
✓ Over Current & Load (kW/kVAR)
✓ Unbalanced Load
✓ Independent Earth Fault
✓ Reverse Power
✓ Loss of Speed Signal

### Instruments

✓ Gen. Voltage (L-L/L-N)
✓ Gen. Frequency
✓ Engine speed
✓ Oil Pressure
✓ Water Temperature
✓ Battery Voltage
✓ Run Time
✓ Phase Sequence
✓ Power monitoring (kWh/kVAh/kVArh)
✓ Power (kW/kVAh/kVArh)
✓ Power Factor
✓ Generator Current
✓ Generator Load (%)
✓ Earth Current

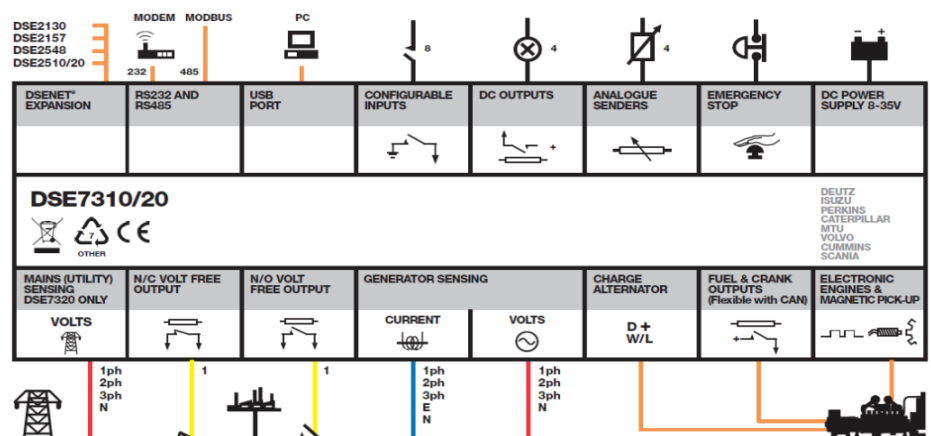

### Standard Features - General

Heavy duty structural steel base frame  
Battery charger  
Jacket Water Heater  
Oil & Coolant Drain Extensions  
Operations Manual

Silencer set with stainless steel flex  
Battery tray and cables  
Heater Isolation Valves  
Rubber vibration Isolator  
Standby Limited Warranty

### Battery Charger


Manufacturer	DSE
Model	9470 MKII
Operation Voltage (L-N)	90V to 305V
Output Current	10A

### Jacket Water Heater

Manufacturer	DSE
Model	9470 MKII
Operation Voltage (L-N)	90V to 305V
Output Current	10A

### Dimensions, Weights & Sound Levels

	L x W x H1 x H2 (inches)	Weight (lbs)	Sound Level *
Open Skid	TBA	TBA	-

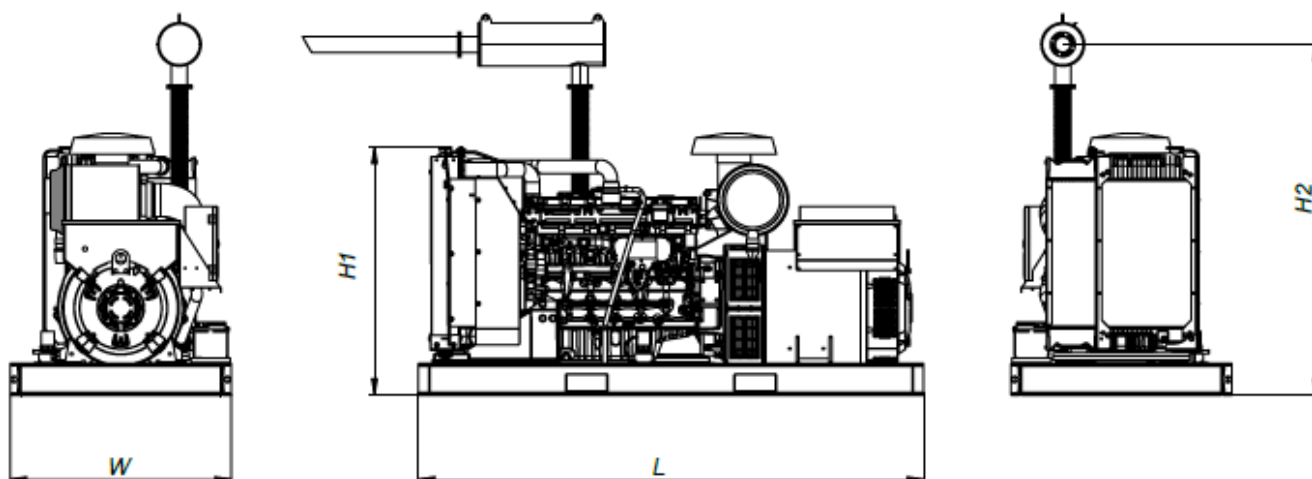

DISTRIBUTED BY:

